

livesound >

portablesound

installedsound

Features

- Two-way passive mid/high
- Compact enclosure
- Line source Polyhorn mid-range device
- Speakon NL4 connectors
- Integral pole mount
- Part of the TMS system

Applications

- Music venues
- Mobile DJ
- Live music

TMS-High passive mid/high loudspeaker




The TMS-High is a passive 2-way mid-high loudspeaker consisting of a horn-loaded 10" MF driver and a 1" HF compression driver in a compact enclosure.

It is designed to be pole mounted with the matching 18" TMS-Low subwoofer, making a high output (129dB peak) full range portable sound reinforcement system. It is equipped with two flush grab handles, and Speakon NL4 connectors are provided on the rear panel for input and parallel link connections. M10 rigging points are provided for use with an optional yoke or for permanent installations using M10 shoulder eyebolts.

TMS series

Frequency Response

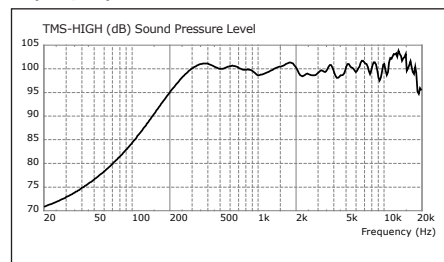


TURBOSOUND Ltd
Star Road
Partridge Green
West Sussex
RH13 8RY
United Kingdom

t: +44 (0)1403 711447
f: +44 (0)1403 710155
e: techsupport@turbosound.com
w: www.turbosound.com

TMS-High

 passive mid/high loudspeaker

DIMENSIONS (HxWxD)	480mm x 452mm x 419mm (18.9" x 17.8" x 16.5")	
NET WEIGHT	20kg (44lbs)	
COMPONENTS	1 x 10" (254mm) MF driver, 1 x 1" (25mm) HF driver	
FREQUENCY RESPONSE	180Hz – 20kHz ±3dB	
DISPERSION	90°H x 40°V @ 6dB points	
POWER HANDLING	200 watts r.m.s., 400 watts program	
SENSITIVITY	100dB 1 watt @ 1 metre	
IMPEDANCE	8 ohms	
MAXIMUM SPL	123dB continuous, 129dB peak	
CONSTRUCTION	15mm (5/8") birch plywood, finished in black textured paint. Two recessed carrying handles	
GRILLE	Powder coated black perforated steel mesh	
CROSSOVER	4kHz	
FLYING HARDWARE	2 x M10 fly points	
CONNECTORS	2 x Speakon NL4	
SPARES AND ACCESORIES	LS-1028	10" (254mm) LF driver
	RC-1028	Recone kit
	CD-121	1" (25mm) HF compression driver
	RD-121	HF diaphragm
	PA-90	90cm Speaker pole
	PA-100	100cm Speaker pole
MORE INFO	More information can be found on our website: www.turbosound.com	

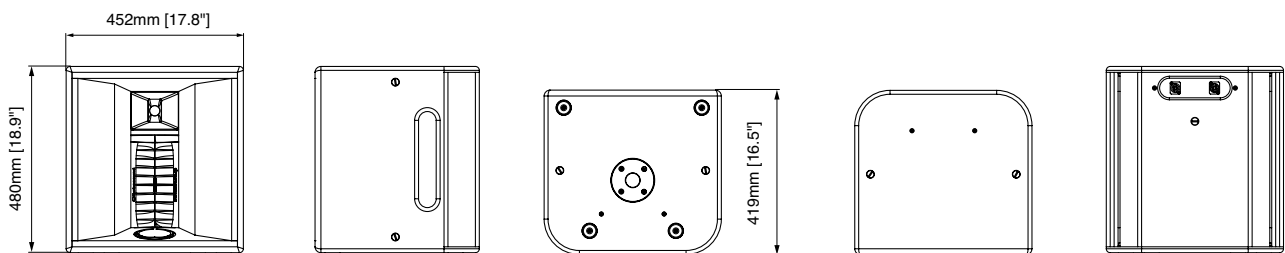

Limited Warranty

Every Turbosound loudspeaker product is warranted to the original end-user purchaser and all subsequent owners for a period of two (2) years for loudspeaker products, or one (1) year for electronics products, from the original date of purchase. Warranty coverage includes defects in materials and workmanship. It does not include:

- damage caused by accident, misuse, abuse, neglect or modification by any other person other than an authorised Turbosound representative,
- damage caused by overdriving, use with unsuitable amplifiers or amplifier failure,
- damage caused by failure to operate the product in accordance with the instructions contained in the user's manual,
- damage occurring during shipment in transit,
- claims based upon any misrepresentations by the seller,
- products which do not have the original components as specified in the product engineering information,
- products on which the serial number has been removed or defaced.

Should any fault develop with a component of your Turbosound system, please return the product, freight pre-paid, in its original packing carton, along with proof of purchase such as the original bill of sale, and a description of the suspected fault, to your local authorised Turbosound representative. The product serial number must be quoted in all correspondence relating to the claim. Insurance is recommended as Turbosound or its representatives are not liable for loss or damage in transit.