

livesound

portablesound

installedsound

TMS-Low subwoofer

Features

- 18" low frequency driver
- Neodymium magnet
- Small footprint
- Integral pole mount
- Speakon NL4 connectors
- Part of the TMS system

Applications


- Music venues
- Mobile DJ
- Live music



The TMS-Low is a compact horn-loaded subwoofer enclosure consisting of an 18" low frequency driver. It is designed for use with the matching TMS-High mid/high enclosure, making a high output (129dB peak) full range portable sound reinforcement system. The birch plywood cabinet is shaped to allow the TMS-High enclosure to be stowed inside the horn flare when transporting the system in and out of a venue. It is fitted with heavy duty wheels and includes an integral pole mount socket to allow the mid/high to be mounted at the correct height. The TMS-High is equipped with flush recessed handles, and Speakon NL4 connectors are provided on the rear panel for input and parallel link connections.

TMS series

Frequency Response

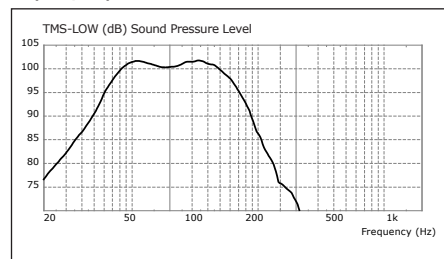


TURBOSOUND Ltd
Star Road
Partridge Green
West Sussex
RH13 8RY
United Kingdom

t: +44 (0)1403 711447
f: +44 (0)1403 710155
e: techsupport@turbosound.com
w: www.turbosound.com

TMS-Low subwoofer enclosure

DIMENSIONS (HxWxD)	835mm x 576mm x 576mm (32.9" x 22.7" x 22.7")	
NET WEIGHT	40kg (88lbs)	
COMPONENTS	1 x 18" (457mm) LF driver	
FREQUENCY RESPONSE	43Hz – 200Hz ±3dB	
POWER HANDLING	500 watts r.m.s., 1000 watts program	
SENSITIVITY	101dB 1 watt @ 1 metre	
IMPEDANCE	8 ohms	
MAXIMUM SPL	128dB continuous, 134dB peak	
CONSTRUCTION	15mm (5/8") birch plywood, finished in black textured paint. Two recessed carrying handles	
CONNECTORS	2 x Speakon NL4 wired: pin 1+: LF positive, pin 1-: LF negative	
SPARES AND ACCESORIES	LS-1817	18" (457mm) LF driver
	RC-1817	LF Recone kit
MORE INFO	More information can be found on our website: www.turbosound.com	

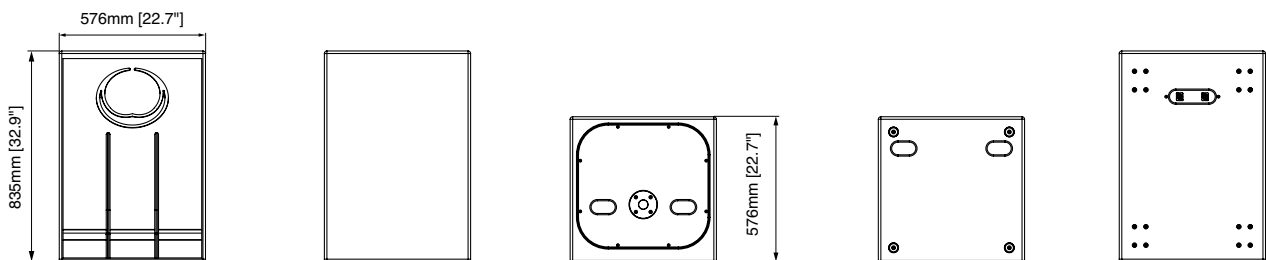

Limited Warranty

Every Turbosound loudspeaker product is warranted to the original end-user purchaser and all subsequent owners for a period of two (2) years for loudspeaker products, or one (1) year for electronics products, from the original date of purchase. Warranty coverage includes defects in materials and workmanship. It does not include:

- damage caused by accident, misuse, abuse, neglect or modification by any other person other than an authorised Turbosound representative,
- damage caused by overdriving, use with unsuitable amplifiers or amplifier failure,
- damage caused by failure to operate the product in accordance with the instructions contained in the user's manual,
- damage occurring during shipment in transit,
- claims based upon any misrepresentations by the seller,
- products which do not have the original components as specified in the product engineering information,
- products on which the serial number has been removed or defaced.

Should any fault develop with a component of your Turbosound system, please return the product, freight pre-paid, in its original packing carton, along with proof of purchase such as the original bill of sale, and a description of the suspected fault, to your local authorised Turbosound representative. The product serial number must be quoted in all correspondence relating to the claim. Insurance is recommended as Turbosound or its representatives are not liable for loss or damage in transit.